


PATTERNS

25cm x 100cm, 50cm x 50cm, 60cm x 60cm


INDEX


PAGE

C-Mesh 224003-Ashlar	2
C-Mesh 224012-Ashlar	3
C-Mesh 224001-02-04-Ashlar	4
C-Mesh 224001-02-Ashlar	5
C-Mesh 224022-Herringbone	6
C-Mesh 224001-02-03-04-Herringbone	7
Specification	9




C-MESH 224003-Ashlar






C-MESH 224001-02-04-Ashlar






C-MESH 224022-Herringbone






C-MESH 224001-02-03-04-Herringbone
2:5:1.5:1.5




C-MESH 224002

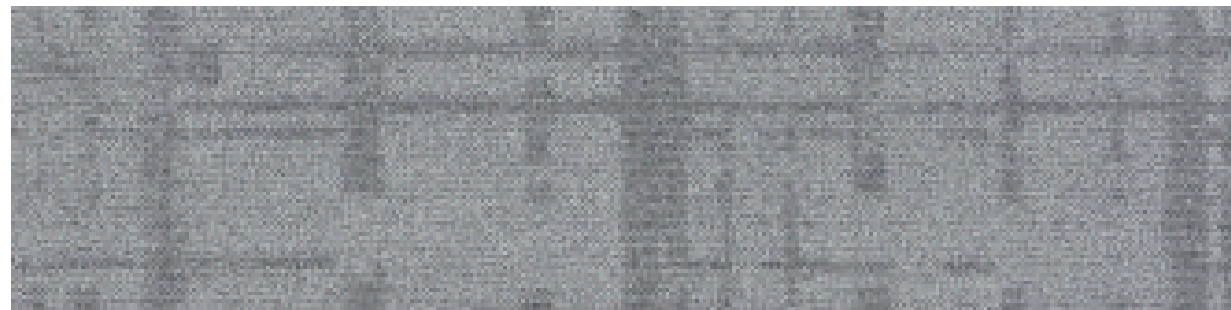

C-MESH 224001

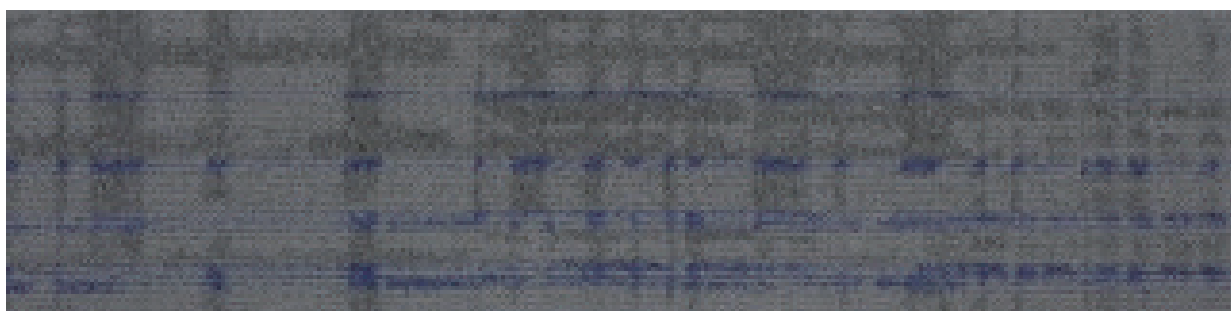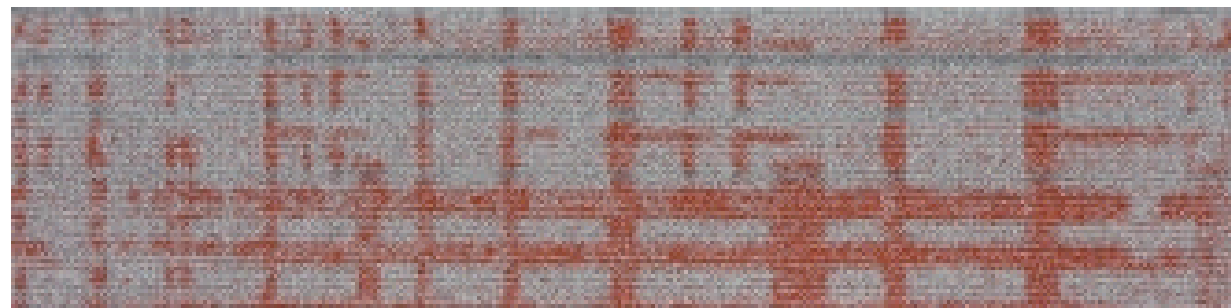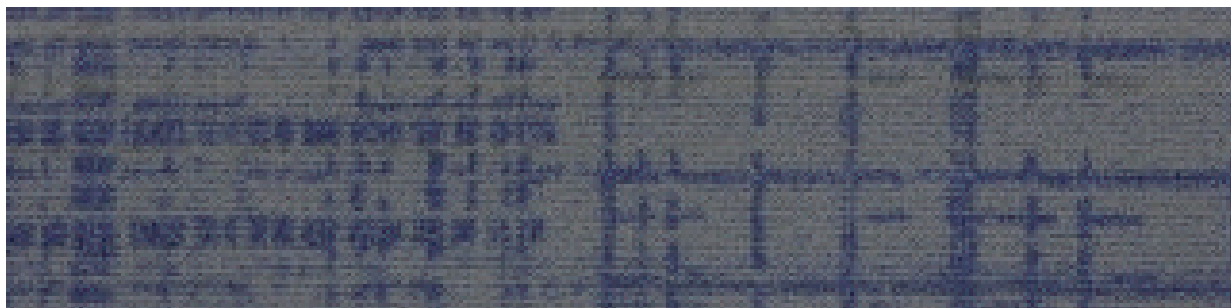



C-MESH 224022

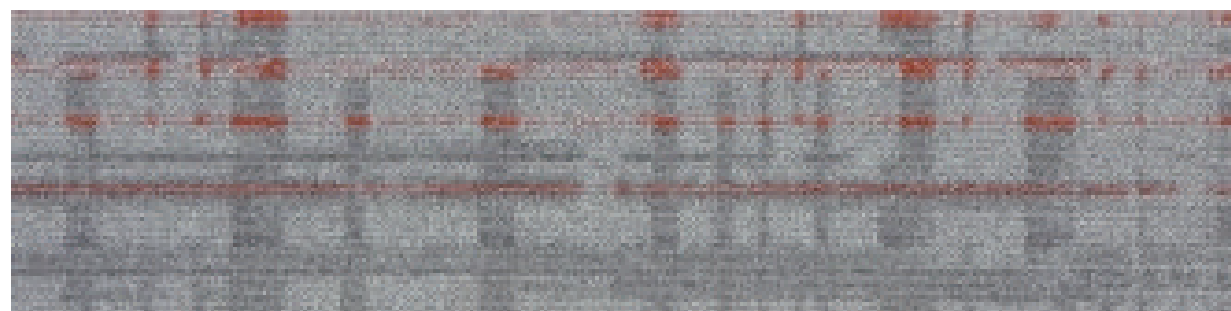

C-MESH 224011



C-MESH 224005

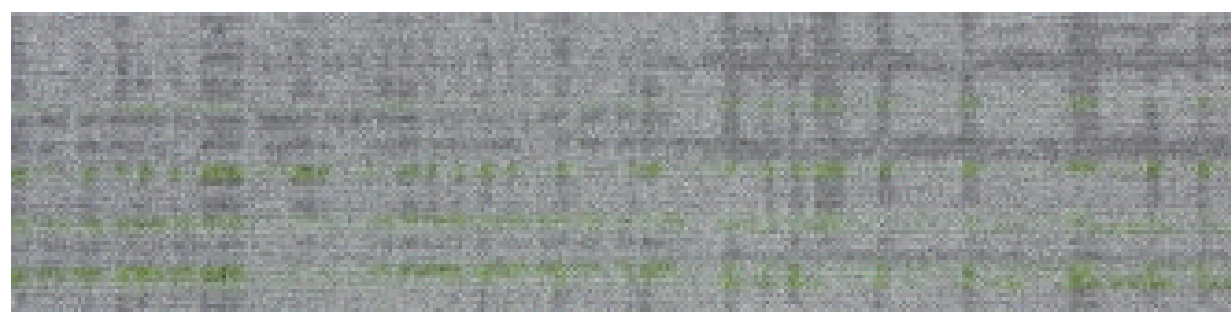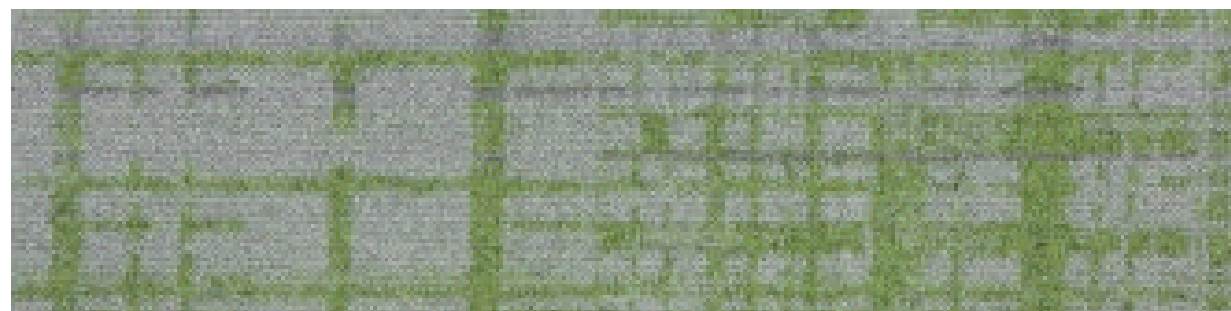


C-MESH 224012


Specifications

Product Name	C-MESH 224
Product Code	C-MESH 224
Tufted construction	Multi-Level loop
Fiber	100% Nylon
Dye method	Solution Dyed
Gauge	1/10
Tufted weight(g/m²)	550 ± 5%
Tile size(mm)	250x1000, 500x500, 600x600
Pile height(mm)	4.0 ± 0.5
Total thickness(mm)	6.5 ± 0.5
Standard Backing	Glass fiber reinforced PVC


Installation Methods



Ashlar



Herringbone




Basketweave

Performance


Radiant Panel	Passes (ASTM E 648)
Methenamine Pill	Passes (ASTM D2859)
Smoke Density	Passes (ASTM E 662)
Fire Resistance	Passes (EN 135-01)
Delamination	Excellent (No Seperation)
Dimensional Stability	<0.2% (AACHEN)
Tuft Bind	Passes (ASTM D1335)
Static Propensity	5 (AATCC-134)
Stain Resistance	8 (AATCC-175)
Color Fastness to Light	5 (AATCC-16 E)
Color Fastness to Crocking	5 (AATCC-165)
Color Fastness to Water	5 (AATCC-107)
Castor Chair	3.5 (BS EN 985)
Hexapod Drum	Passes (ASTM D5252)
Green Carpet(VOC)	CRI Green Label
Acoustic-Nylon	BS EN ISO 354
Sound Absorption	BS EN ISO 10140

Warranties

10 years limited warranty:
No more than 10% face yarn loss by weight under normal use
Limited static warranty.
Limited delamination warranty under normal use.



Anti-fouling



Anti-static




Environmental



Passed various tests



Fashion colors




100%B,C,F Yarn




Reduced Flammability



Isolation acoustic



Colorfast



Chair roulettes



No edge ravel



Wear resistance



Soil Resistance




Wear Warranties



Dimensional Stability



Long life-span



Easy to transport



Non-mold