

WHITEHORSE



PATTERNS

50cm x 50cm

INDEX	PAGE
WHITEHORSE - #2	2
WHITEHORSE - #3 & 4	3
WHITEHORSE - #7	4
WHITEHORSE - #8	5
WHITEHORSE - #9	6
WHITEHORSE - #11	7
Specification	9



SWH #2, Quarter-turn



WH #3 #4, Monolithic



SWH #7, Monolithic










SWH #9, Monolithic




WH #11, Monolithic

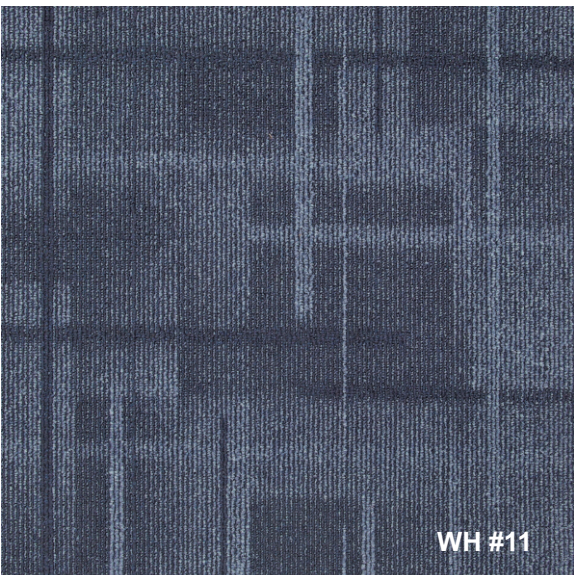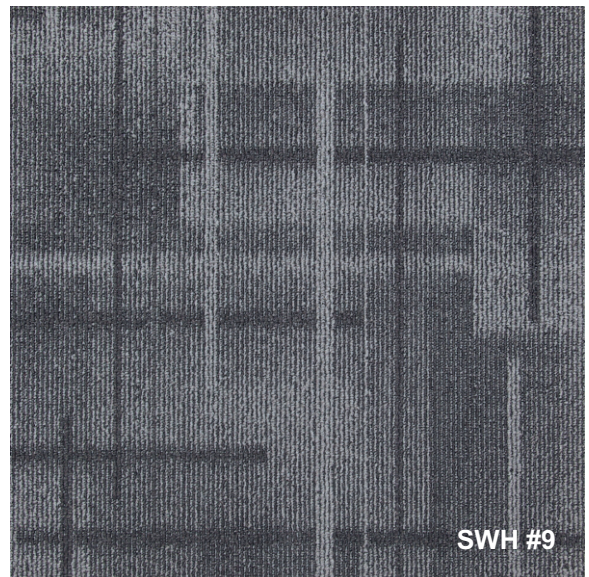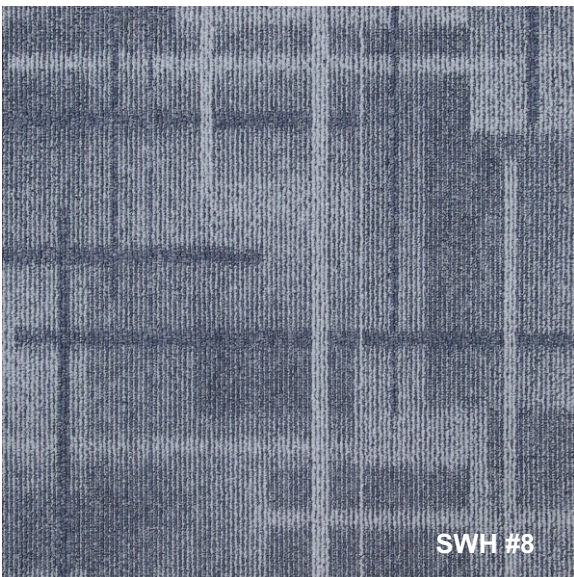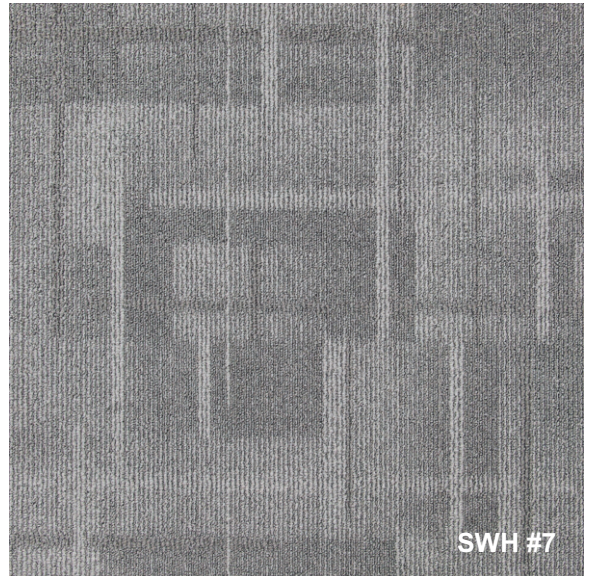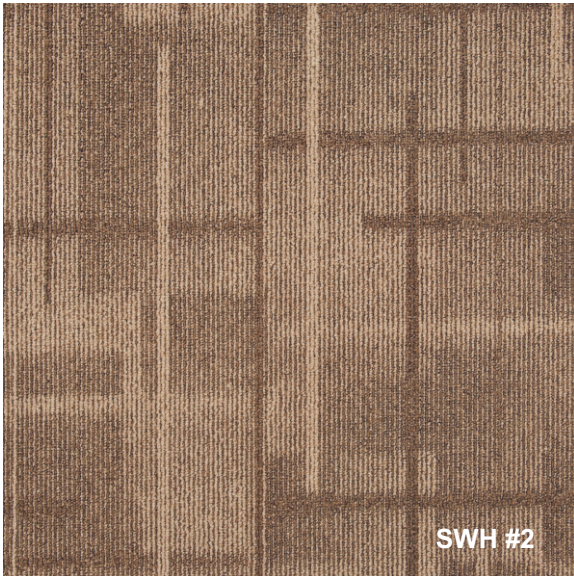


Specifications

Product Name	WHITEHORSE
Product Code	WHITEHORSE
Tufted construction	Multi-Level loop
Fiber	100% Nylon
Dye method	Solution Dyed
Gauge	1/12
Tufted weight(g/m ²)	680 ± 5%
Tile size(mm)	500x500
Pile height(mm)	4.0 ± 0.5
Total thickness(mm)	10.0 ± 0.5
Standard Backing	Mix Bac

Installation Methods



Monolithic



Quarter-Turn

Performance

Radiant Panel	Passes (ASTM E 648)
Methenamine Pill	Passes (ASTM D2859)
Smoke Density	Passes (ASTM E 662)
Fire Resistance	Passes (EN 135-01)
Delamination	Excellent (No Separation)
Dimensional Stability	<0.2% (AACHEN)
Tuft Bind	Passes (ASTM D1335)
Static Propensity	5 (AATCC-134)
Stain Resistance	8 (AATCC-175)
Color Fastness to Light	5 (AATCC-16 E)
Color Fastness to Crocking	5 (AATCC-165)
Color Fastness to Water	5 (AATCC-107)
Castor Chair	3.5 (BS EN 985)
Hexapod Drum	Passes (ASTM D5252)
Green Carpet(VOC)	CRI Green Label
Acoustic-Nylon	BS EN ISO 354
Sound Absorption	BS EN ISO 10140

Warranties

10 years limited warranty:

No more than 10% face yarn loss by weight under normal use

Limited static warranty.

Limited delamination warranty under normal use.



Anti-fouling



Anti-static



Environmental



Passed various tests



Fashion colors



100%B,C,F Yarn




Reduced Flammability




Isolation acoustic



Colorfast



Chair roulettes



No edge ravel




Wear resistance



Soil Resistance




Wear Warranties



Dimensional Stability



Long life-span



Easy to transport



Non-moid